

Standard Pallet Sizes & Specifications

PRESSWOOD PALLETS
100% recycled wood fibre
ISPM-15 exempt · 4-way entry



NESTABLE PALLETS — 4-WAY ENTRY

MODEL	SIZE L × W (MM)	TYPE	STACKING LOAD	LIFTING LOAD
CP 1	1200 × 800	Nestable	2000 kg	1000 kg
CP 2	1200 × 1000	Nestable	3000 kg	1500 kg
CP 3	1100 × 1100	Nestable · double-deck compatible	3000 kg	1500 kg
CP 4	1130 × 1130	Nestable	3000 kg	1500 kg
CP 10	1000 × 1000	Nestable	3000 kg	1500 kg
CP 11	1370 × 1100	Nestable	3000 kg	1500 kg

2-WAY PALLETS & DOUBLE DECK

MODEL	SIZE L × W (MM)	TYPE
CP 5	1100 × 1100	2-way nestable
CP 6	1200 × 1000	2-way nestable
CP 7	1300 × 1100	2-way
CP 8	1100 × 1100	Double-deck base — with or without pallet

2-way and double-deck models share the 3000 kg stacking / 1500 kg lifting rating. Minimum order quantity applies on 2-way models.

MATERIAL & PERFORMANCE

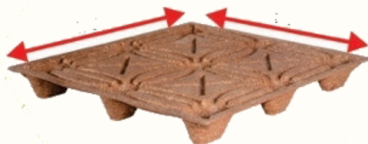
Construction
One-piece compression-moulded recycled wood fibre. No nails or staples.

Export compliance
ISPM-15 exempt — no fumigation or heat-treatment stamp required.

Lab tested
ISO 8611 compression, forklift

**1200 × 800**

CP 1 · Nestable, 4-way

**1200 × 1000**

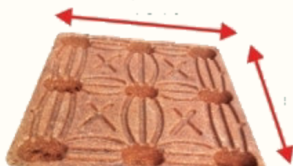
CP 2 · Nestable, 4-way

**1100 × 1100**

CP 3 · Nestable, double-deck compatible

**1130 × 1130**

CP 4 · Nestable, 4-way

**1000 × 1000**

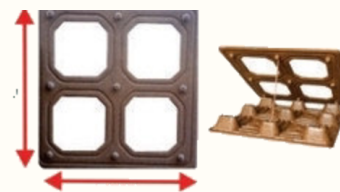
CP 10 · Nestable, 4-way

**1370 × 1100**

CP 11 · Nestable, 4-way

**2-way pallets — 1100 × 1100 · 1200 × 1000 · 1300 × 1100**

CP 5 / CP 6 / CP 7 · Nestable, 2-way entry

**1100 × 1100 double deck**

CP 8 · Base, with or without pallet